

4-3 RS-485 Repeater/Hub/Splitter

I-7514U **NEW**

Isolated 4 Channels RS-485 Repeater/Hub/Splitter



Features ▶▶▶▶

- True RS-485 Star Wiring Hub
- Power and data flow indicator for troubleshooting
- Easy-to-use rotary switch for fixed baud rate setting, 1200 ~ 115200 bps
- Independent RS-485 driver for each channel
- Automatic RS-485 Direction Control
- 120 Ω termination resistor for each channel
- Operating Temperatures, -25 °C ~ +75 °C

Introduction

RS-485 Active Hub

The I-7514U is a 4-ch RS-485 active star wiring hub, it has 4 independent RS-485 output channels and one RS-485 input channel. Each output channel is equipped with an individual driver. The data from a master to the input channel will simultaneously be forwarded to all the four output channels.

Baud Rate Setting

The I-7514U provides 2 modes of baud rate setting, one is Self-Tuner mode and the other is fixed baud rate mode. The Self-Tuner mode can support Multiple Baud Rate and Multiple Data Format. The Self-Tuner design is exactly the same as I-7513 and I-7510 series. The Fixed baud rate mode offers a better quality for data transmission over long or lossy lines or electrically noisy environments.

RS-485 Short-Circuit

The Short-circuit protection can automatically shut off the breakdown channel, this kind of design can protect the communication system. When a connected RS-485 equipment breaks down, the breakdown channel will be isolated to ensure that other equipments work normally.

Termination resistors

In some critical environments, you may need to add termination resistors to prevent the reflection of serial signals. The I-7514U includes a 120 Ω termination resistor for each channel by jumper selectable (Default disable).

LED Indicators

The I-7514U has 6 LED to indicate the power status and network traffic. The Tx/D/RxD LED will flash when the unit is being sent out or received data.

System Specifications



Interface	
Input (Master)	1 RS-485 Channel: Data+, Data-
Output (Slave)	4 RS-485 Channels: Data+, Data-
2-wire Cabling	Max. 1,200 m at 9.6 kbps; Max. 400 m at 115.2 kbps
Self-Tuner Asic Inside	Yes
Speed	300 ~ 115200 bps via Self-Tuner mode; 1200 ~ 115200 bps via Fixed Baud Rate mode
ESD Protection	Yes
2500 V _{dc} Isolation on CH1 ~ CH4	2-way Isolated
Connection	Removable 10-Pin Terminal Block x 1; Removable 6-Pin Terminal Block x 1
LED Indicators	
Power/Communication	Yes
Power	
Input Voltage Range	+10 V _{dc} ~ +30 V _{dc} (Non-isolated)
Power Consumption	1.2 W
Mechanical	
Casing	Plastic
Flammability	Fire-Retardant Materials (UL94-V0 Level)
Dimensions (W x H x D)	72 mm x 122 mm x 35 mm
Installation	DIN-Rail
Environment	
Operating Temperature	-25 °C ~ +75 °C
Storage Temperature	-30 °C ~ +75 °C
Humidity	10 ~ 90% RH, non-condensing

4-3

RS-485 Repeater/Hub/Splitter


I-7514U

Applications

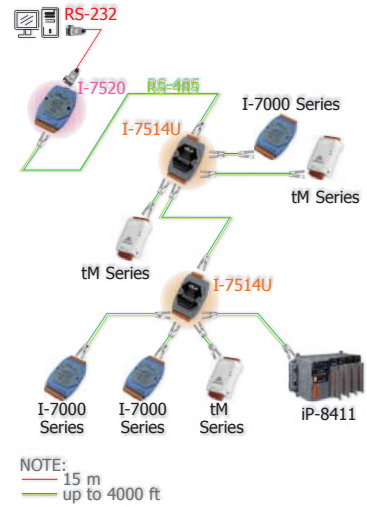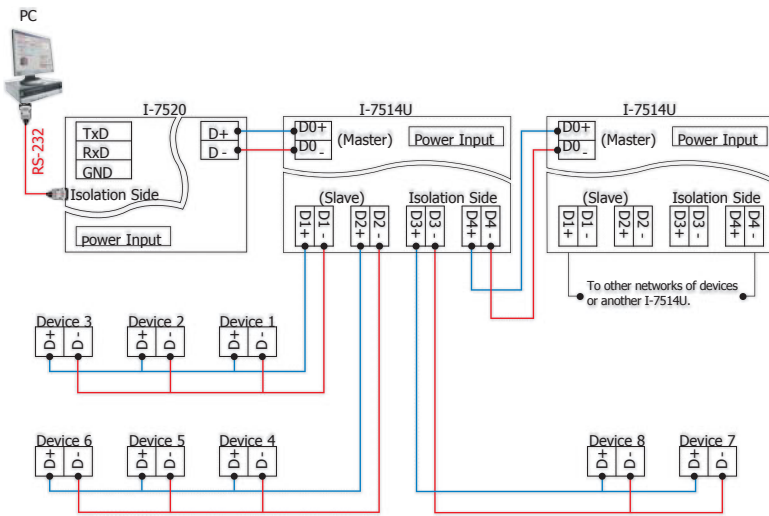


NOTE:
15 m
up to 4000 ft

Internal I/O Structure

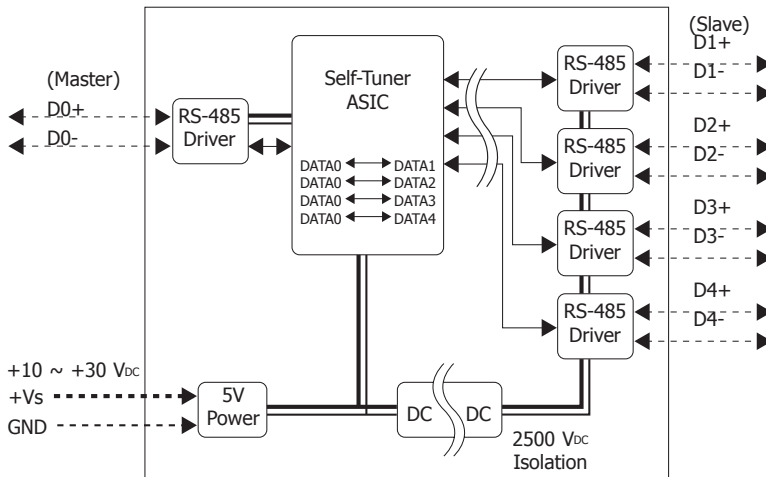


The following block diagram shows how I-7514U was designed as independent channel. Data coming from the master input will be transmitted to all four RS-485 slave channels. But data coming from the slave channels will be returned to the master input only. Thus reduces the possibility of interference between each RS-485 slave loop and makes the RS-485 networks more robust and reliable.

Pin Assignments



Terminal No.	Pin Assignment
01	D1+ CH1
02	D1- CH1
03	D2+ CH2
04	D2- CH2
05	D3+ CH3
06	D3- CH3
07	D4+ CH4
08	D4- CH4
09	N.C.
10	ISO.GND
11	D0-
12	D0+ CH0
13	D0-
14	D0+
15	(R)+Vs
16	(B)GND

Dimensions (Unit: mm)

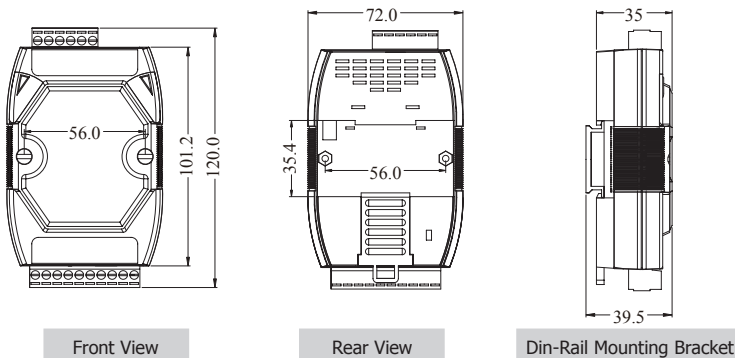

Ordering Information

I-7514U-G CR	Isolated 4 Channels RS-485 Active Hub (Gray Cover) (RoHS)
--------------	---

Accessories

GPSU06U-6	24 Vdc/0.25 A, 6 W Power Supply
DIN-KA52F	24 Vdc/1.04 A, 25 W Power Supply with Din-Rail Mounting