




DIN-Rail Mounted Relay Modules

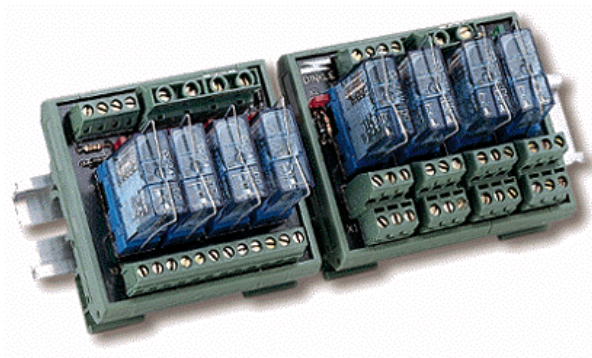

Introduction : RM series relay modules are designed to be mounted on DIN RAIL TS-15, TS-32 or TS-35. RM-10X contains SPDT relays, while RM-20X contains DPDT relays. In order to prevent improper operation, reverse polarity protection is provided. The status of each channel is indicated by an LED. These relay modules are provided in 4, 8 or 16 channel versions.

RM-10x Series

RM-104 4 channel power relay module **RM-108** 8 channel power relay module **RM-116** 16 channel power relay module

Rated current for each relay : 16A Provide one Normally Closed and one Normally Open connection for each channel	Maxi. Peak current : 30A Maxi. Switching voltage : 400V AC	Standard contact material : Ag Ni	Input Voltage : DC 24 V
---	---	-----------------------------------	-------------------------

RM-20x Series

RM-204 4 channel power relay module **RM-208** 8 channel power relay module **RM-216** 16 channel power relay module

Rated current for each relay : 6A Provide two NO and two NC connections for each channel	Maxi. Peak current : 10A Maxi. Switching voltage : 400V AC	Standard contact material : Ag Ni	Input Voltage : DC 24 V
---	---	-----------------------------------	-------------------------