



**iSN-101**      **iSN-101/DIN**  
Liquid Leak Detection Module

## Features

- Liquid Leak Detection
- Leak detection triggers and audible alarm
- A mute button to silence the alarm
- Two LED indicators to display the status of the power and the alarm
- A configurable Output Relay
- Leader cables and Sensor Cable can be up to 500 meters
- Adjustable detection sensitivity
- Supports the DCON and the Modbus RTU Protocols
- Embedded Dual Watchdog
- Wide Operating Temperature Range: -25 to +75°C
- Tiny Form Factor with Easy Screw Mounting



## Introduction

The iSN-101 Liquid Leak Detection Module is a low-cost intelligent liquid leak detection device that can be used to directly control Relay Output. No additional conversion module is needed and the iSN-101 can be easily integrated with a variety of monitoring systems to achieve remote alarm and remote device control. The iSN-101 Liquid Leak Detection module can be used to monitor double-core leader cable lengths of up to 500 meters, and can be used with both the sensor cable and its included water leakage probe. If liquid is detected, the controller immediately activates the output relay - the normally open, normally closed passive output signal. The module can be easily integrated with other collection hosts connected to the network. The iSN-101 is suitable for real-time leak detection in critical locations, such as computer room base stations, warehouses, libraries, museums and industrial sites, and also for air handling equipment, refrigeration units, liquid containers, or pump tanks, etc., where there is a need to monitor any leakage of the equipment.

When required, communication with the iSN-101 can be programmed based on the Modbus RTU protocol, with the added benefit that different addresses can be configured via hardware to allow for Modbus RTU communication.

## System Specifications

Communication	
Interface	RS-485
Format	N,8,1 / O,8,1 / E,8,1 / N,8,2
Baud Rate	Software Configuration: 1200 ~ 115200 bps
Protocol	Modbus RTU or DCON
Node Addresses	96 ~ 127 for hardware configuration 0 ~ 255 for software configuration
LED Indicators	
LED Indicators	1 as Power Indicator. 1 as Alarm Indicator.
Relay Output	
Form C Relay	0.5 A @ 125 VAC 2 A @ 30 VDC
EMS Protection	
ESD (IEC 61000-4-2)	±8 kV Air for Random Point
EFT (IEC 61000-4-4)	±4 kV for Power
Power	
Reverse Polarity Protection	Yes
Input Voltage Range	10 to 30 VDC
Consumption	1.5 W Max.
Mechanical	
Dimensions (W x L x H)	83 mm x 70 mm x 29 mm
Installation	DIN-Rail
Environment	
Operating Temperature	-25 to +75°C
Storage Temperature	-30 to +80°C
Humidity	10 to 90% RH, Non-condensing

## I/O Specifications

Analog Input	
Channels	1
Wiring Cables Length	500 meters(include sense cable)
Sound Off Button	The button is used to stop the audible alarm.
Adjustment of the Detection Sensitivity	26 KΩ ~ 580 KΩ

## Configuration




DIP Switch Description		
	SW1	ON    DCON Protocol OFF    Modbus RTU Protocol
	SW2	ON    Software Configuration OFF    Hardware Configuration
	SW3	ON    High Node Address OFF    Low Node Address
	SW4	ON    INIT Mode OFF    Normal Mode

## Applications



The iSN-101 is a leakage detection module used in water pipe leak monitoring in buildings with two working modes.

1. Work with the water sense cable that installed near the possible leaking pipe or area to detect leakage with alarm.
2. Work with the water leakage probe that installed in fixed possible leak locations to detect.


The leakage monitoring is applied to the water pipes, fire pipes and sewage pipes of buildings, as well as the detecting of domestic water, drainage and electric equipment, which can effectively achieve water saving and ensure the safety of living. The iSN-101 can detect leakages, send out signal and alarms, combine with the WISE IoT Edge Controller or TPD/VPD Touch HMI, and to further integrate with the mobile APP or community system.

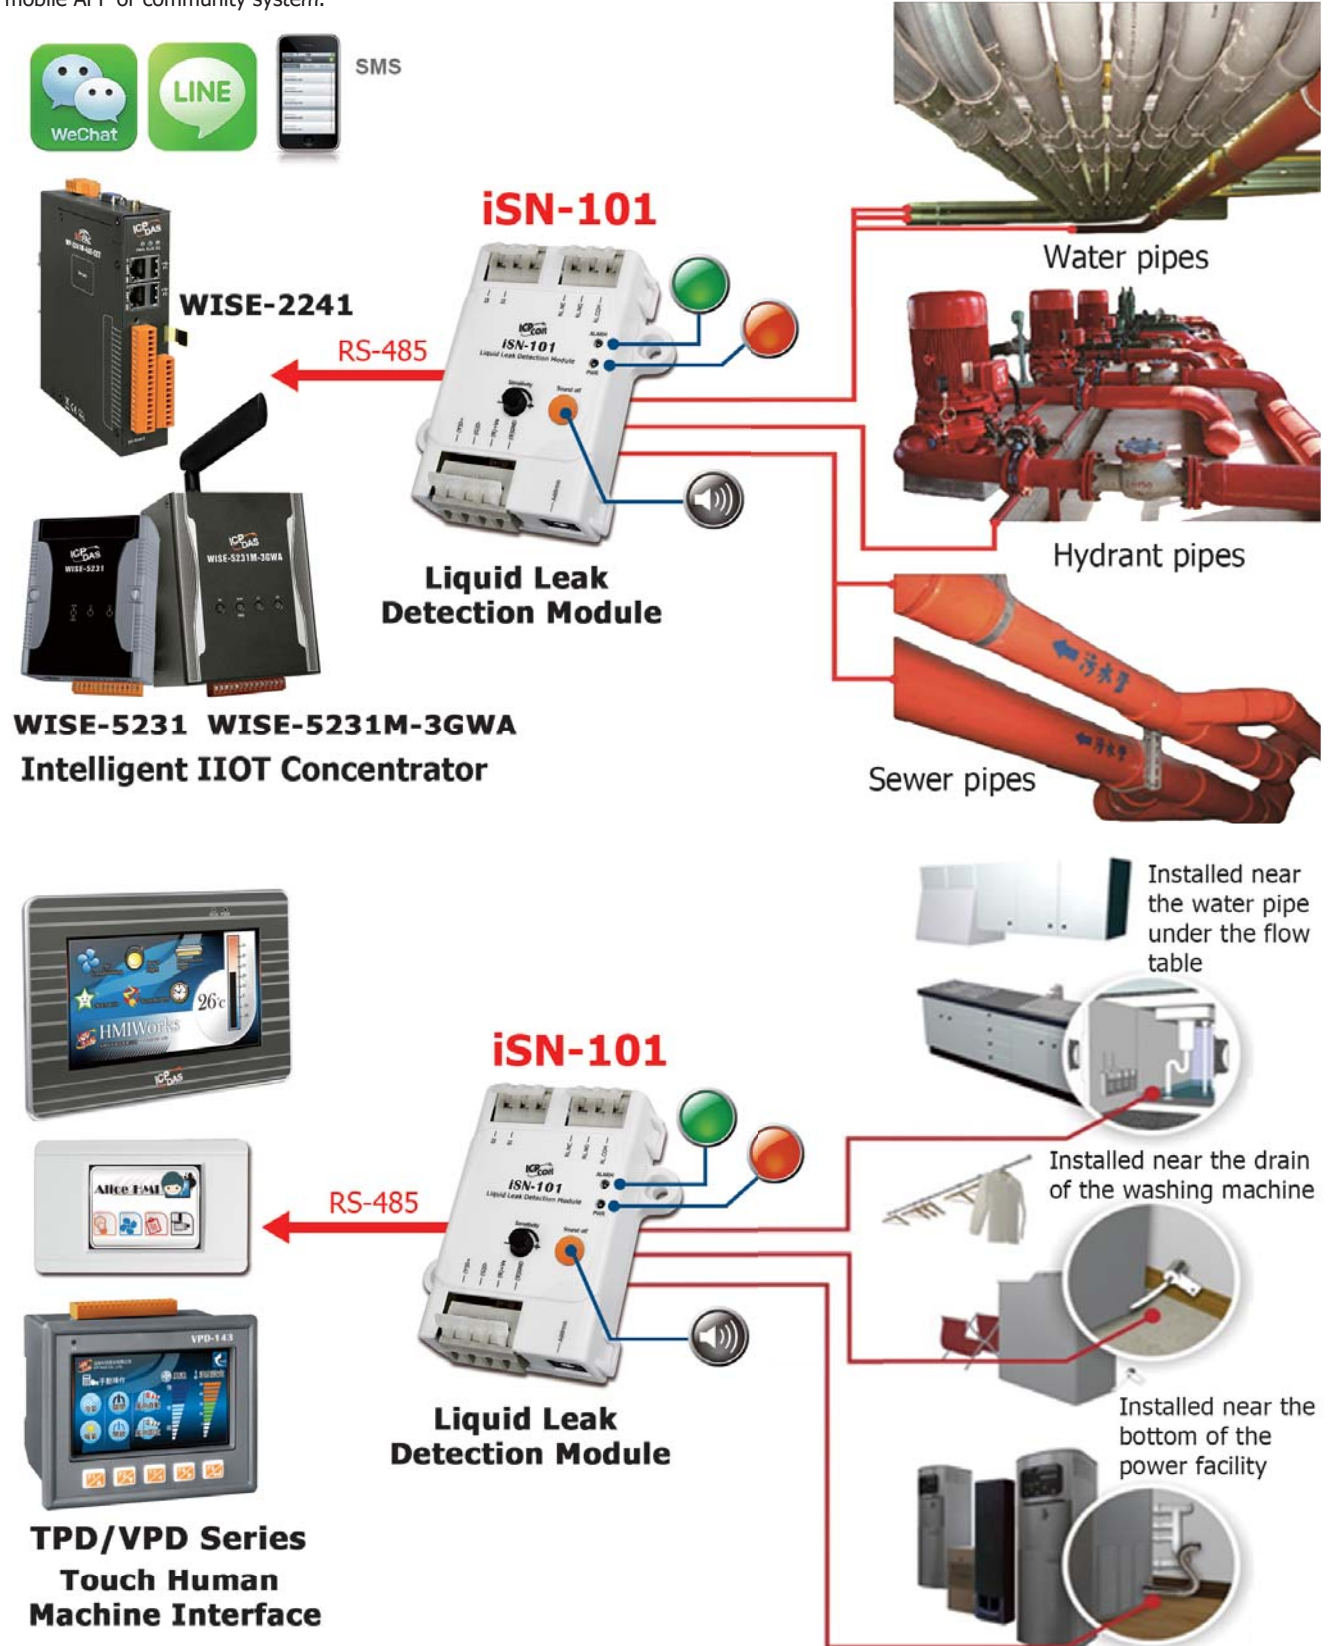

## Wire Connections

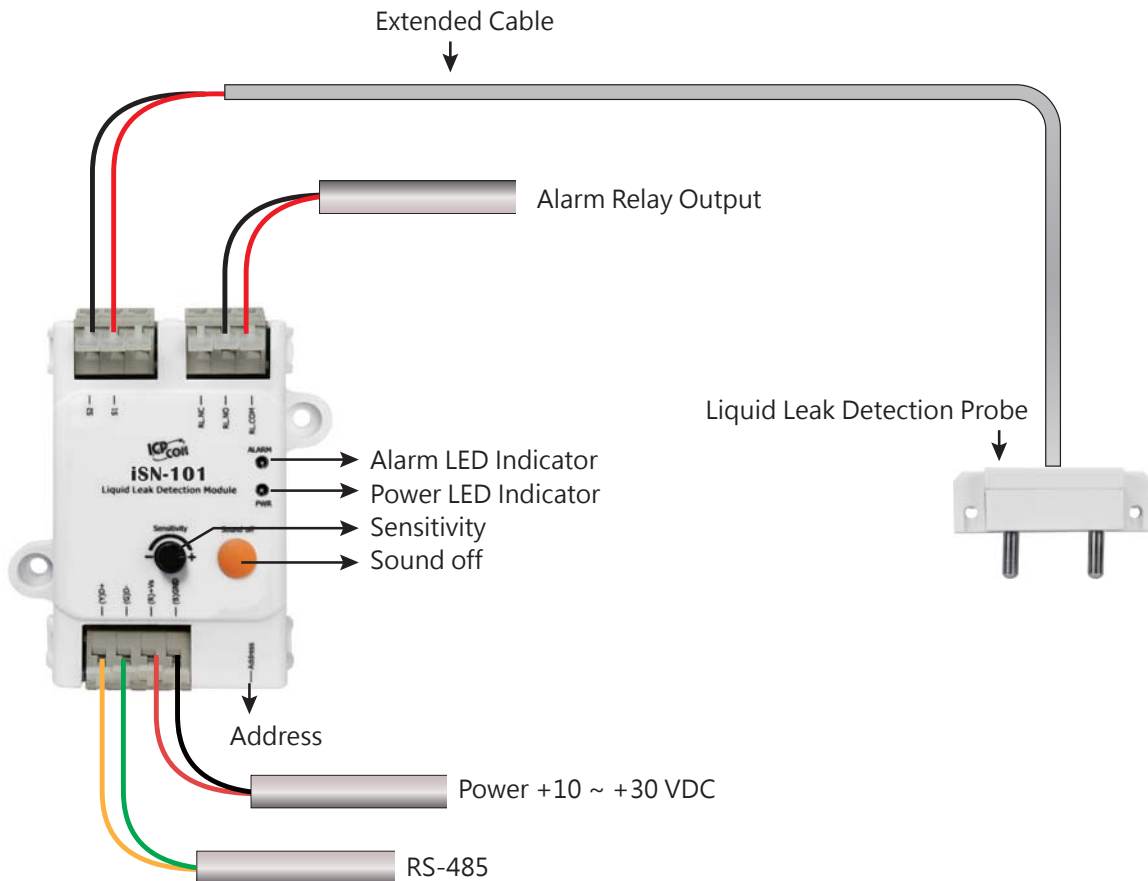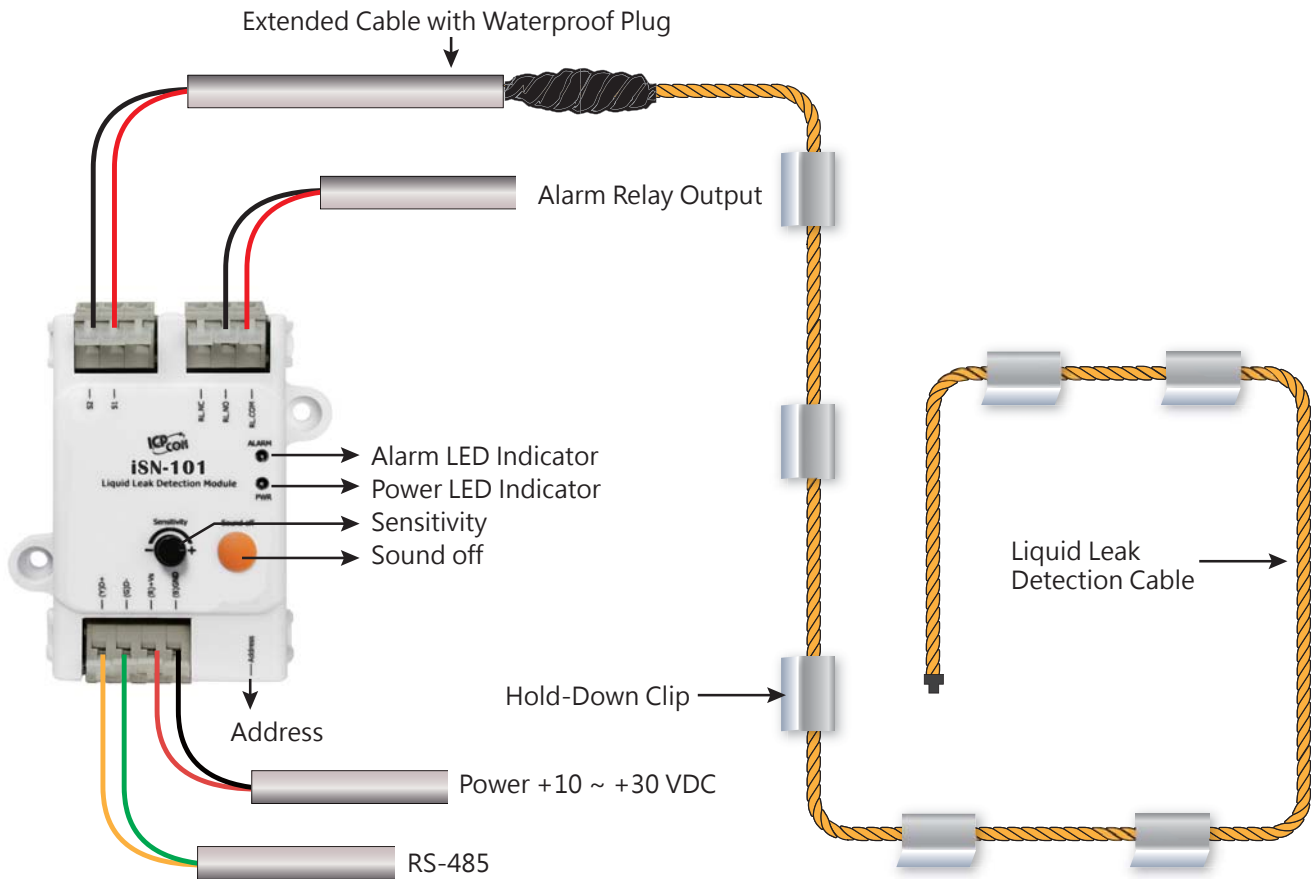

## PIN Assignments

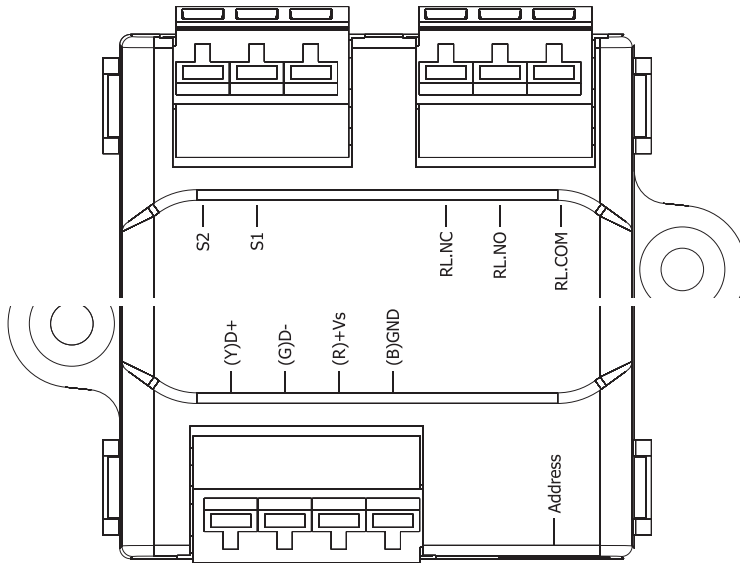

## Ordering Information

<b>iSN-101 CR</b>	1-channel Liquid Leak Detection Module (RoHS)	
<b>iSN-101/DIN CR</b>	1-channel Liquid Leak Detection Module (DIN Rail mount) (RoHS)	
<b>iSN-101/S CR</b>	1-channel Liquid Leak Detection Module (RoHS)	
<b>iSN-101/S/DIN CR</b>	Includes an iSN-101 Module, a 1m Liquid Leak Detection Cable and 3m Extended Cable.	
<b>iSN-101/S2 CR</b>	1-channel Liquid Leak Detection Module (RoHS)	
<b>iSN-101/S2/DIN CR</b>	Includes an iSN-101 Module, a 3m Liquid Leak Detection Cable and 3m Extended Cable.	
<b>iSN-101/S3 CR</b>	1-channel Liquid Leak Detection Module (RoHS)	
<b>iSN-101/S3/DIN CR</b>	Includes an iSN-101 Module and a ASO-0045 Leakage Probe.	
<b>iSN-101/S CR = iSN-101 + CA-LLD-DC100-L010 + CA-LLD-EC-L030</b>	<b>iSN-101/S2 CR = iSN-101 +CA-LLD-DC100-L030 + CA- LLD-EC-L030</b>	<b>iSN-101/S3 CR = iSN-101 + CA-LLD-DP100</b>

## Accessories

	tM-7520U CR	RS-232 to RS-485 converter (RoHS)		I-7514U CR	4-channel RS-485 Hub (RoHS)
	tM-7561 CR	USB to RS-485 converter (RoHS)			

1m Water Sense Cable	3m Water Sense Cable	3m Leader Cable	Leakage Probe	180 Hold-Down Clip	90 Hold-Down Clip
<b>CA-LLD-DC100-L010</b>	<b>CA-LLD-DC100-L030</b>	<b>CA-LLD-EC-L030</b>	<b>CA-LLD-DP100</b>	<b>ASO-0046</b>	<b>ASO-0047</b>